



This document must not be copied without our written permission, and the contents thereof must not be imparted to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

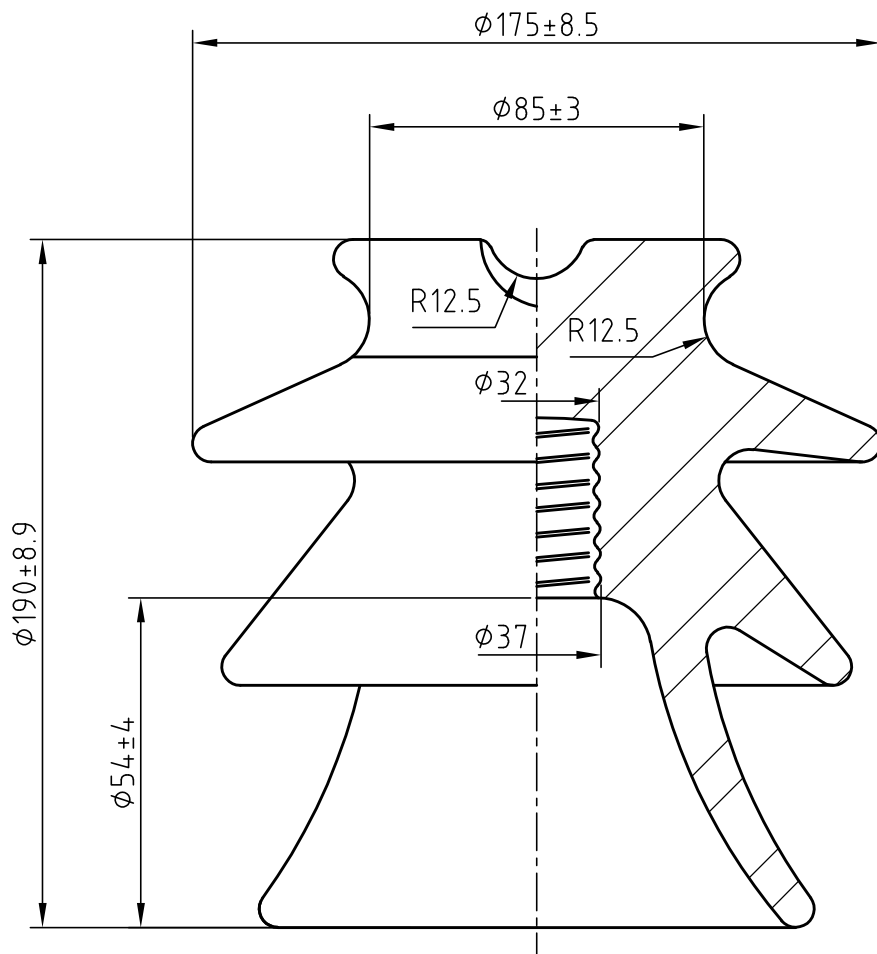

| | |
|--|--------|
| Rated Voltage | 24 kV |
| Creepage distance: | 384 mm |
| One minute withstand voltage Wet: | 50 kV |
| Impulse withstand voltage: | 125 kV |
| Bending failing load: | 10 kN |
| Glaze color | Brown |
| Tested according to IEC 60383 or equivalent. | |

| | | | | | |
|--|---------------|---------------|-----------------|----------------|---|
| Scale (%) | Drawn JANEČEK | Checked ĐURÁK | Date 09.04.2021 | Ref. DC.ZS5062 |  PPC INSULATORS 3095-0-P <small>Drwg.no. Rev.</small> |
| PIN TYPE INSULATOR VHD-20 | | | | | |