
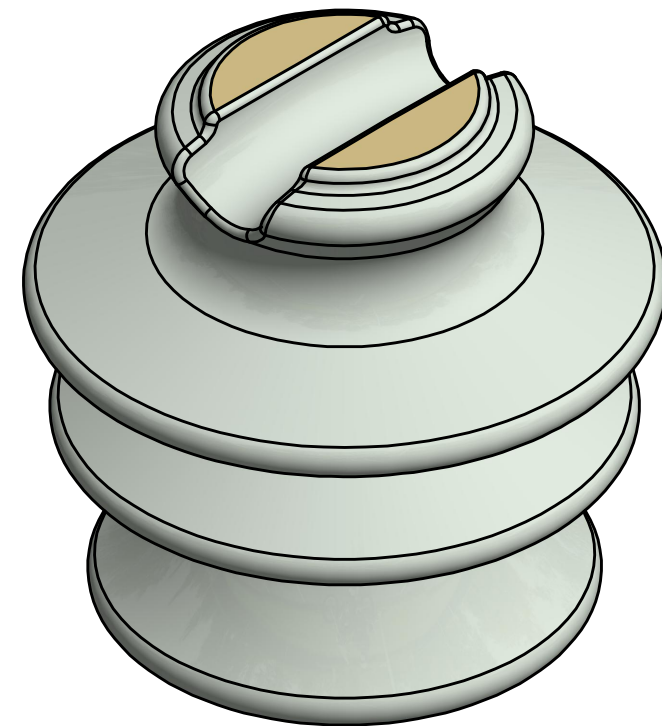



PPC INSULATORS
 YYYY/MM
 "PIF 2-SV"

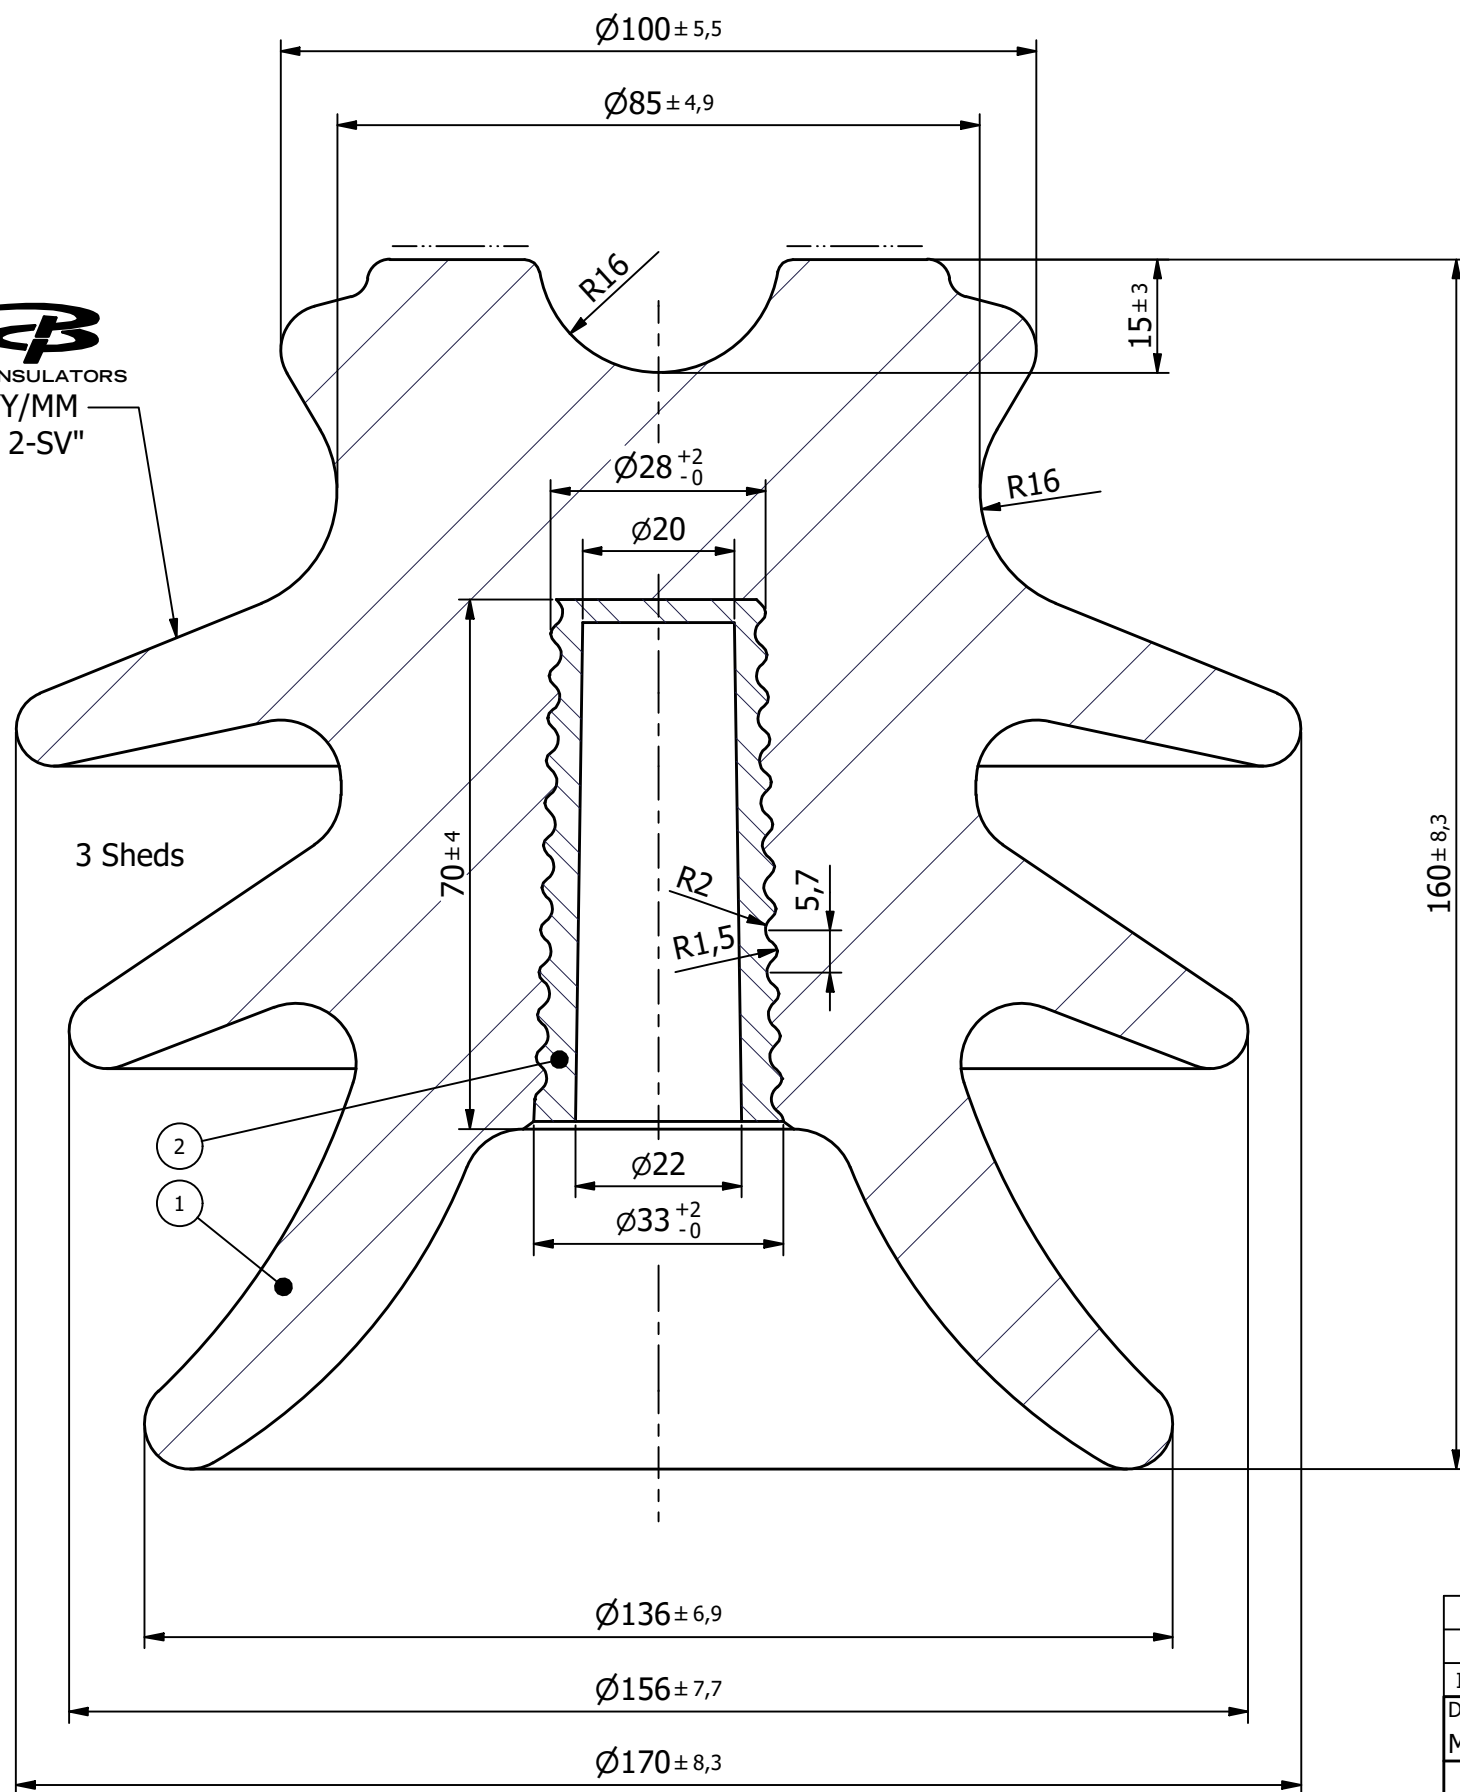

Lightning impulse withstandvoltage, dry 125 kV
 Power frequency puncture voltage: 130 kV
 Power frequency withstand voltage, wet: 50 kV
 Creepage distance: 325 mm
 Minimum failing load bending: 12,5 kN
 Glaze color: Grey
 ————— Unglazed surface
 Testing acc. to IEC 60383
 Mass: 3,2 kg

2	1	Plastic insert			0,1 kg	
1	1	Porcelain	4F51-0-P		3,1 kg	
Item	Qty	Description	Part No.	Material	Weight	Reference
Designed by:	Checked by:	Approved by:	Date:	Scale:	Format:	 PPC INSULATORS
M.Đurák	M.Janeček	M.Đurák	02.03.2022	1 : 1	A3	
Reference:				Drawing / Product No.:		Revision:
Pin Insulator				4F51-0-M-G		0
PIF 2-SV - 24 kV				Group-ID:		Project:
						1